



QGA Quantitative Gas Analyser

A compact bench-top system for real-time gas and vapour analysis

Detailed product information / introduction



A compact bench-top gas analyser configured for real-time, multi-species analysis with wide dynamic range – 100 ppb to 100%

Applications:

- gas reaction studies
- catalysis
- reaction kinetics
- ▶ TPD/TPR/TPO
- thermal analysis mass spectrometry
- gas purity analysis/contamination studies
- process characterisation
- fermentation off-gas analysis
- environmental gas analysis
- combustion studies
- ▶ CVD/MOCVD

Key Features

- multiple gas and vapour analysis 200 amu mass range, 300 amu option
- ▶ 2 metre continuous sampling heated capillary inlet
- gas sample flow rate 16 atm. cc/min standard. 1 atm. cc/min option
- ▶ high sensitivity: detection to 100 ppb
- > <300 ms response time to changes in gas concentration
- ▶ fast data acquisition: up to 500 measurements per second
- ▶ integrated CO analyser option for the analysis of low level CO in the presence of N₂ and CO₂
- soft ionisation for reduced spectral fragmentation and simplified data interpretation
- broad range of sampling accessories
- custom designed interfaces available to suit a wide range of TGA instruments for evolved gas analysis




Software



QGA Professional main screen



Automatic mass spectral analysis setup

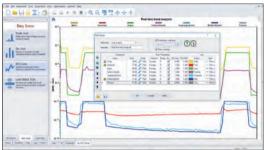

MASsoft Professional – overview



Trend analysis (MID setup)

QGA Professional

An application specific software package for quantitative gas and vapour analysis providing real-time continuous analysis of up to 32 species with concentrations measured in the range 0.1 ppm to 100%.

Key Features - QGA Professional Software

- automatic calibration with background correction
- automatic subtraction of spectral overlaps
- quantitative analysis of up to 32 gases
- ▶ 10 peak spectral library with intelligent library scan feature
- > automatic triggering of analysis from an external input
- x-axis can display time or an external input, e.g. temperature


MASsoft Professional

A multi-level software package allowing both simple control of mass spectrometer parameters and complex manipulation of data plus control of external devices.

Key Features - MASsoft Professional Software

- profile, bar and multiple ion detection (MID) modes
- mass spectrometer ionisation energy control for soft ionisation of complex mixtures
- export data to NIST MS database for analysis of unknowns
- export to external data analysis software, e.g. Excel, Origin
- control of external devices e.g. MFCs, gas switching/sampling valves and furnace PID controllers
- output data as percentage or ppm values
- real-time subtraction of overlapping peaks
- > scan templates for fast setup of scans
- user selected alarm facilities

Technical Data

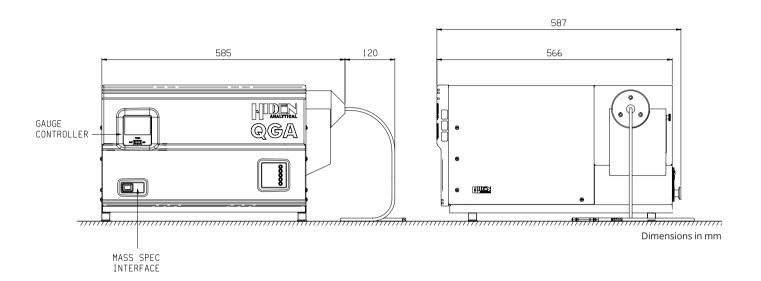

| Mass ranges, amu: | 1-200 / 1-300 amu | |
|--------------------------------------|---|--|
| Sensitivity: | 100% to 100 ppb subject to spectral interference | |
| Speed: | Maximum measurement speed is 500 measurements/second | |
| Response time: | 300 ms | |
| Software: | MASsoft Professional & QGA Professional | |
| | Windows 7/8/10 compatible | |
| Dimensions (L x W x H), mm: | 585 x 566 x 318 mm | |
| Weight, kg: | 40 kg and external scroll pump 23 kg | |
| Power requirement: | 110/220/240, 50/60Hz 0.6 KVA & external scroll pump 0.3 KVA | |
| Interface: | Ethernet/USB/serial (RS-232) connections | |
| Gas consumption rate: | 16/8/3.2/0.8 sccm (user configurable) | |
| Capillary operating temperature, °C: | up to 200 standard/300/350/400/450 options | |
| Detector: | Dual Faraday/Channeltron Electron Multiplier | |
| Analogue input: | 8x (optional)/16 bit | |
| Analogue output: | 16x (optional)/14 bit | |
| Digital input: | 8x | |
| Digital output: | 8x, 24V | |

System Configuration & Options

| ITEM | DESCRIPTION | PARTCODE |
|------------------------------------|--|------------|
| SYSTEM | QGA bench-top gas analysis system, including Hiden HAL 201 RC mass spectrometer with Faraday Multiplier detector. Mass range 200 amu. Includes external scroll pump. QGA Professional & MASsoft Professional included as standard. Includes standard QIC capillary inlet for operation up to 200°C | 305110 |
| OPTIONS & ACCESSORIES | Extended mass range. 300 amu mass range (in place of standard 200 amu mass range) | 305113 |
| | Corrosion resistant upgrade | 303604 |
| | CO Analyser 0 - 10.000 ppm range | 303595 |
| SPARES KIT | QIC heated capillary inlet filter (2 µm) | 303576 |
| | Recommended spares kit Replacement capillary liner Replacement Platinum leak orifice Twin filament | 303147 |
| GAS INLET OPTIONS | QIC HT 250 high temperature capillary inlet - 250°C | 303561 |
| | QIC HT 450 very high temperature capillary inlet - 450°C | 303568 |
| | LP-SSC Low pressure capillary - 25 mbar to 250 mbar | 303564 |
| | VLP-GLC very low pressure sampling capillary - 1 mbar to 10 mbar | 303558 |
| | QIC inlet adapters for TA-MS - Custom designed interfaces to suit a broad range of TGA instruments for evolved gas analysis | 303580-585 |
| MULTI-STREAM SELECTOR MANIFOLDS | MSV 8-way multi-stream valve | 303688 |
| | 20-way Proteus multi-stream valve | 303650 |
| | 40-way Proteus multi-stream valve | 303660 |
| | 80-way Proteus multi-stream valve | 303670 |
| SOFTWARE OPTIONS | EGAsoft - application specific software program for evolved gas analysis, TA-MS and TPD studies | 800295 |





QGA - external scroll pump

HidenAPPLICATIONS

Hiden's quadrupole mass spectrometer systems address a broad application range in:

GAS ANALYSIS

- dynamic measurement of reaction gas streams
- catalysis and thermal analysis
- molecular beam studies
- dissolved species probes
- fermentation, environmental and ecological studies





SURFACE ANALYSIS

- UHV TPD
- SIMS
- end point detection in ion beam etch
- elemental imaging 3D mapping

PLASMA DIAGNOSTICS plasma source characterisation etch and deposition process reaction kinetic studies analysis of neutral and radical species



- partial pressure measurement and control of process gases
- reactive sputter process control
- vacuum diagnostics
- vacuum coating process monitoring



Hiden Analytical Ltd. 420 Europa Boulevard Warrington WA5 7UN England

- 1 +44 [0] 1925 445 225
- F +44 [0] 1925 416 518
- info@hiden.co.uk
- www.HidenAnalytical.com











Sales Offices:

We have sales offices situated around the globe. Visit our website for further information.

